

SPECIFICATIONS:

Frame Width 159mm


Frame Height 50_{mm}

Glass Thickness 6-33mm

KEY FEATURES:

- Available in single and double glazed frame variants
- Robust commercial framing system ideal for apartments, commercial and luxury home applications
- Square clean lines
- Highly configurable
- Tested and compliant to AS2047
- Captive glazing wedge on one side, allowing the system to be either glazed internally or externally
- A large range of adaptors, sub sills, sub heads, sub jambs etc to accommodate any installation

AWNING WINDOW

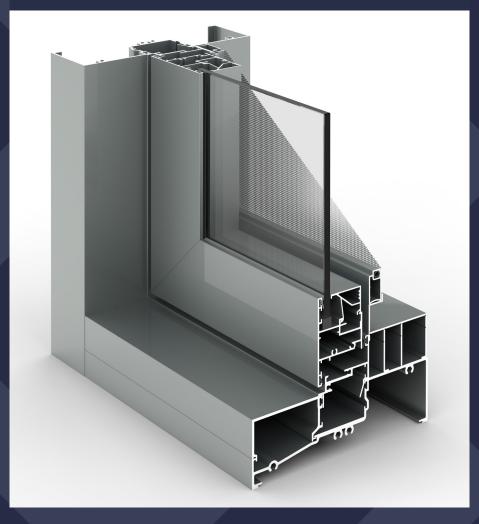

- Compatible with all window types in Evolution 640 Series range
- Large range of stiffeners, varying size interlocks & adaptors to suit most wind & water pressure requirements.





98 Catalano Circuit, Canning Vale, WA 6155 PO Box 1373, Canning Vale, WA 6970

All suites can be double glazed